


MODEL	CR-25
Product description	Power supply for ILC and MLC chargers
Enclosure	Powder coated steel (black)
Input voltage	100 ... 240 VAC 50-60 Hz 2,4 (+Outlet) A
Output voltage	5 x 12 VDC
Output current	Max. 4,5 A
Operating temperature	+5 °C ... +40 °C
Outlet	Max. 10 A (100 ... 240 VAC)
Weight	4,8 kg, empty CR-25 unit (code: CR25) 5,8 kg, with 5 MLC chargers (code: CR25-5MLC) 6,8 kg, with 10 MLC chargers (code: CR25-10MLC) 7,4 kg, with 5 ILC chargers (code: CR25-5ILC)
Dimensions	Approx 210 mm (L) x 840 mm (W) x 63 mm (H)
Mounting	Wall mounted horizontal
Compatible product	Max. 5 pcs ILC (for MICA IL-series) Max. 10 pcs MLC (for MICA ML-series)
Input cable	Length 2,5 m Available with Euro, UK and US plug
Other features:	Chargers are easy to install. Full kit for installing different chargers is included. All racks are equipped with one socket for linkability.




CR-25 and 5 x ILC / IL-640

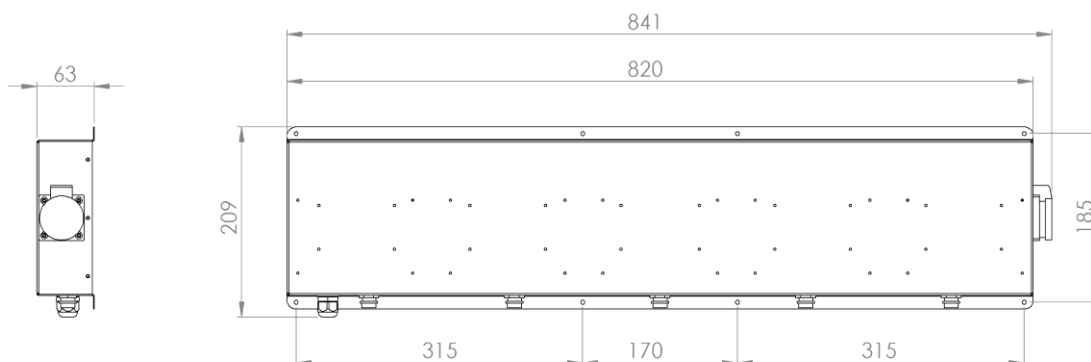

CR-25 and 5 x ILC



CR-25 and 5 x MLC

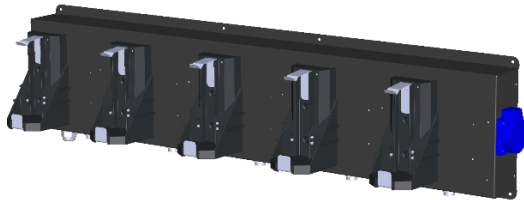

CR-25 and 10 x MLC



CR-25 and 5 x ILC

